
# flo

# **TECHNICAL SPECIFICATION SHEET**

**PRODUCT NAME:** Flo Dynamic Monitor Arm

PRODUCT CODE: DYN/013/010

Doc Rev 1. 27.05.15. CF

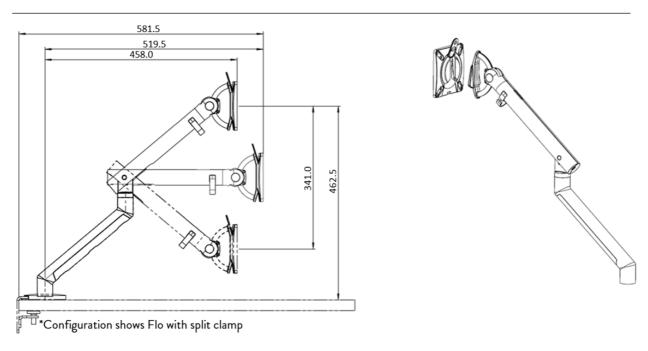

<sup>\*</sup>Note that dimensions provided are measured in mm

# **KEY FEATURES**

- Award-winning aesthetic design and functionality
- Smooth, dynamic movement through its patented Flo Spring Technology
- Unique head design provides unrivalled degree of flexibility for tablets and touch screens
- Weight gauge reduces installation time and provides consistent performance
- o Integrated three-point cable management system
- Minimal environmental impact
- Portrait / landscape screen mounting
- MBDC Cradle to Cradle Silver Certification

Product ClassificationMonitor ArmsMin Load3kg (6.6lb)Max load9kg (19.84lb)

**Tilt range** 48.5° upwards, 48.5° downwards

Horizontal Range 458mm
Vertical Range 341mm
Build level #G
Recycled content 34%
Total product recyclable 100%



# **LOGISTICAL**

Box contains Arm & Quick Release Mount Plate, Allen Key

Product net weight: 1.8 kg

**Box dims (HxWxD)** 90 x 130 x 671 mm

Box gross weight 1.9 kg
Carton quantity 6

**Master dims (HxWxD)** 275 x 295 x 690 mm

Master weight 13.3 kg
Country of origin China
Country of configuration UK

### ORDERING INFORMATION

<u>Colour</u> <u>Product code</u> <u>EAN</u>

Silver DYN/013/010/S 5060270823681 White DYN/013/010/W 5060270823704

# **WARRANTY**

Warranty Term Limited lifetime – Excludes

**Notes** Excludes quick-release – warranty 5 years

### **COMPLIANCE & SAFETY CERTIFICATION**

Whilst no mandatory standards apply to the monitor arm product sector, all Colebrook Bosson Saunders monitor arms have been designed with appropriate articulation features, dimensional range and adjustability to conform to the requirements of BS EN ISO 9241:5 1999 Ergonomic requirements for office work with visual display terminals (VDTs).

Conformance certification • BS EN ISO 9241:5 1999 Ergonomic Requirements for office work

with visual display terminals (VDTs). FIRA certificate of

conformance

• FIRA load testing and lifetime fatigue test - PP050. Passed as

suitable for 'severe use'

Test authority FIRA
Safety certification N/A



# **ENVIRONMENTAL**

Material type	Material type Weight	% PIR of total weight	% PCR of total weight	% of total product recyclable
Aluminium Die Cast	1088g	13.48%	26.95%	<b>6</b> 7.38%
Aluminium Extruded	Og	0%	0%	0%
Plastic	107g	0.33%	0.33%	6.63%
Rubber	Og	0%	0%	0%
Steel	391.7g	0%	6.06%	24.26%
Stainless Steel	27g	0%	0.33%	1.67%
Brass	1g	0%	0.01%	0.06%
Total	1614.7	13.81%	33.69%	100%

# **CLEANING, STORAGE & MAINTENANCE**

**Routine servicing** Periodic inspection **Service components** Available to order

Cleaning & Maintenance Damp cloth, no abrasives, no solvents to be used on the cosmetic

surfaces

Handling & Storage Do not drop or expose to moisture

Colebrook Bosson Saunders (Products) Ltd accept no liability for the accuracy of the information contained herein and retain the right to modify the specifications or data contained herein without prior notification.

